


# Marine Antenna Data Sheet

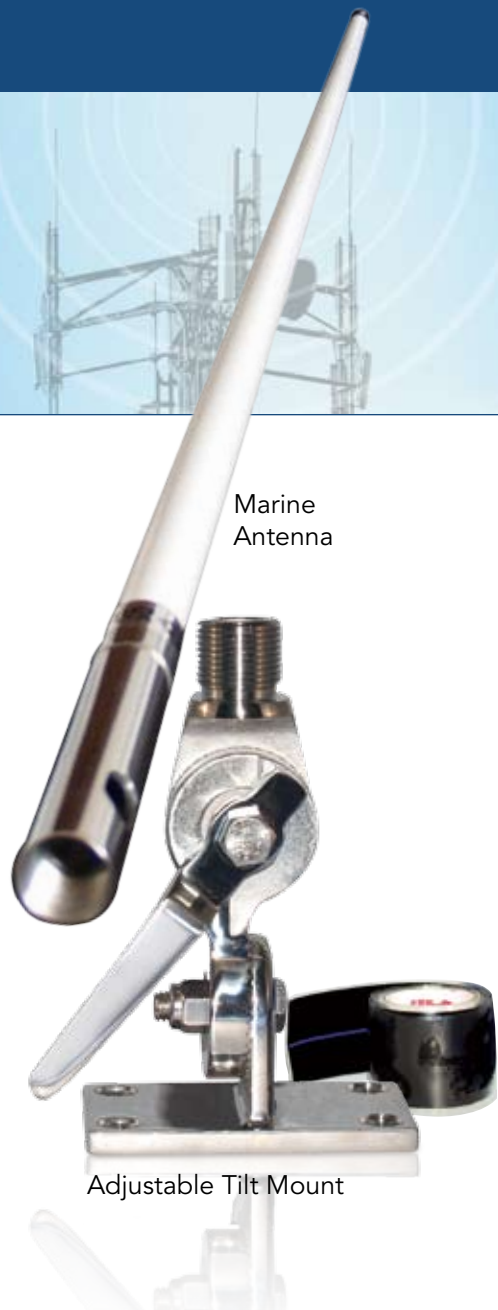

Marine Antenna

Adjustable Tilt Mount

## Marine Antenna 810-950/1800-1980 MHz

### Item Description

Dual band 810-950/1800-1980 MHz white marine antenna. Used in areas where the standard Phantom antenna does not obtain suitable reception. High gloss fiberglass, brass radiating elements, soldered connections and removable stainless steel ferrule with female threads delivers high quality signal and performance. N female connector directly on the antenna. Includes quality swivel mounting bracket and weatherproofing kit. Order coax cable separately.

### Specifications

<b>Gain (dBd) Cell/PCS</b>	9	<b>Cable</b>	Order separately
<b>Maximum Power</b>	250 Watts	<b>Connector</b>	N female
<b>Whip Length</b>	48"	<b>Warranty</b>	5 Years
<b>Whip Material</b>	Fiberglass	<b>Qty/Uom</b>	1 EACH
<b>Frequency Range</b>	Dual Band 810-950/1800-1980	<b>Mount Type</b>	1"-14 male thread mount

### Ordering Information

Part Number: MARINE

## Coax Cables

### Item Description

The coax cables are used in conjunction with the OmniSite Marine Antenna. When the antenna needs to be mounted at a distance from the unit or when mounted up in the air. The coax cables are available in 10', 30' and 50' lengths. All connections mounted in the elements must be weatherproofed.

### Specifications

<b>Cable type:</b>	3/16" Braided	<b>Insulation:</b>	Solid Polyethylene
<b>Shield %:</b>	90%	<b>Loss per 100':</b>	10.7 dBd
<b>Impedance:</b>	50 ohms	<b>Connectors:</b>	N-Male, SMA-Male
<b>VOP:</b>	80%	<b>Available lengths:</b>	10', 30', 50'

### Ordering Information

Part Number: CABLE10 (10' cable), CABLE30 (30' cable), CABLE50 (50' cable)